

DA2control

PERFECT CONTROL THANKS TO ROTATION ANGLE MODE

The new *DA2control* battery-powered nutrunner enables precise connections for every application with its integrated torque and angle of rotation function as well as detection of direction of rotation. The bolting parameters are set

directly on the device, which ensures flexible and quick adjustment. Thanks to intuitive operation and OTA updates, your device is always up to date - for maximum performance and reliability.

+ LCD DISPLAY

All important bolting parameters at a glance

+ UP-TO-DATE




Function updates on site (OTA over-the-air)

INTUITIVE
Menu control via start and direction buttons




COMBINED TORQUE/ ROTATION ANGLE MODE

- F E A T U R E S**
- ▶ Torque / angle function
 - ▶ Bolting parameters can be set directly on the device
 - ▶ Detection of direction of rotation
 - ▶ Management of bolting parameters and access rights




DA2

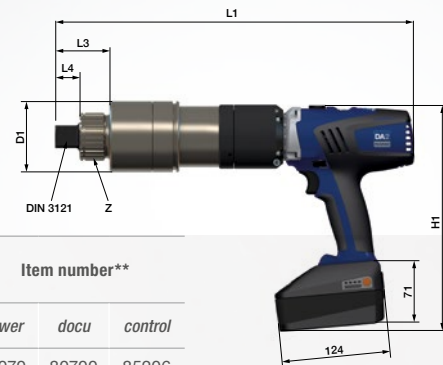

Type	Torque range / Nm		L1 mm	L3 mm	L4 mm	D1 mm	H1 mm	Z	Speed 1. Gear	Speed 4. Gear	Weight* kg	Drive square	Item number**		
	min	max											power	docu	control
DA2-05	130	550	365	60,5	26,5	68,5	253	26	8,4	71,6	5,3	3/4"	86070	80700	85206
DA2-10	180	1.000	365	60,5	26,5	68,5	253	26	5,3	48,0	5,3	3/4"	86080	80710	85207
DA2-20	220	2.000	405	61,5	27,5	80,0	253	26	3,0	24,6	6,8	1"	86090	80720	85208
DA2-30	330	3.000	405	61,5	27,5	80,0	253	26	2,3	20,9	6,8	1"	86100	80730	85209
DA2-36	380	3.600	405	61,5	27,5	80,0	253	26	1,8	15,3	6,8	1"	86110	80740	85210
DA2-48	500	4.800	437	83,5	43,5	86,0	253	45	1,4	12,9	7,8	1 1/2"	86120	80750	85211
DA2-80	700	8.000	521	106,0	43,5	101,0	253	39	0,7	5,7	12,5	1 1/2"	86130	80760	85212

DATA AND MODELS

DA2 ANGLED VERSION

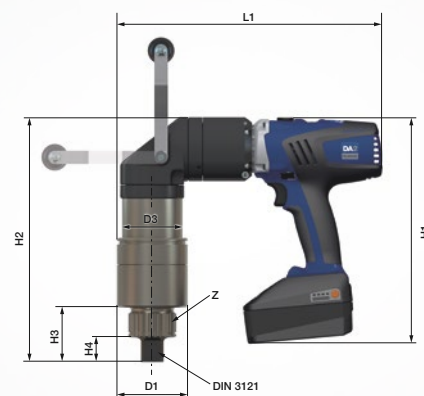

Type	Torque range / Nm		L1 mm	H1 mm	H2 mm	H3 mm	H4 mm	D1 mm	Z	Speed 1. Gear	Speed 4. Gear	Weight* kg	Drive square	Item number**
	min	max												power
DA2-05-W	130	550	305,25	253	245,0	60,5	26,5	68,5	26	8,4	71,6	6,2	3/4"	80701
DA2-10-W	180	1.000	305,25	253	245,0	60,5	26,5	68,5	26	5,3	48	6,2	3/4"	80711
DA2-20-W	220	2.000	311,00	253	285,0	61,5	27,5	80,0	26	3,0	24,6	7,8	1"	80721
DA2-30-W	330	3.000	311,00	253	285,0	61,5	27,5	80,0	26	2,3	20,9	7,8	1"	80731
DA2-36-W	380	3.600	311,00	253	285,0	61,5	27,5	80,0	26	1,8	15,3	7,8	1"	80741
DA2-48-W	500	4.800	314,00	253	316,5	83,5	43,5	86,0	45	1,4	12,9	9,5	1 1/2"	80751
DA2-80-W	700	8.000	321,50	253	400,5	106,0	43,5	101,0	39	0,7	5,7	13,5	1 1/2"	80761

DA2 SAFETY

Type	L2 mm	H1 mm
DA2-05-SST	343	344
DA2-10-SST	343	344
DA2-20-SST	343	344
DA2-30-SST	343	344
DA2-36-SST	343	344
DA2-48-SST	343	344



Repeat accuracy: ≤ 4%, depending on the bolting cases. Technical data without guarantee. *Data without reaction arm and battery.

**Article numbers of the basic modules without reaction arm, battery and accessories. Battery weight: 0.75 kg

PLARAD®
Torque & Tension Systems

Maschinenfabrik Wagner GmbH & Co. KG
Birrenbachshöhe 17 // 53804 Much (Germany)
Phone: +49 2245 62-0

www.plarad.com
info@plarad.com



PRODUCT PDF